ET145

Tracked Conventional Excavator

The champion in the compact class

The ET145 is one of the world's largest compact excavators, providing the power and performance of a larger model in a more compact package. It offers a perfect balance of power, maneuverability and stability. The ET145 features the most up-to-date innovations for comfortable and intuitive operation to tackle even bigger jobs.

Highlights

- Swivel bracket
- Comfortable, fully glazed cab
- 7-inch display and rear-view camera
- Up to 5 additional control circuits ex work
- AUX II

Technical Data

Hydraulic

Operating pressure hydraulics	320.0 bar
Hydraulicpump	Double variable and 2 gear pumps
Flow rate max.	305.0 l/min
Tank capacity	110.0 l

Mechanical - Output Details

Travel speed	5.1 km/h

Mechanical Details

Length	7,788.0 mm
Width	2,490.0 mm
Height	2,786.0 mm
Operating weight (min.-max.)	15,551.0 - 17,275.0 kg
Digging depth (max.)	5,442.0 mm

Engine

Cooling	Water-cooling
Engine type	Diesel engine
Cylinder	4.0
Cylinder capacity	3,621.0 cm3
Fuel	Diesel EN 590
Effective power	55.0 KW
Nominal Engine speed	2,050.0 1/min
Exhaust-gas limit	EU Stage V
Battery capacity (nom. value)	120.0 Ah
Engine Manufacturer	Perkins
Engine Designation	904J-E36TA

Environment Data

Sound level LpA	75.0 dB(A)
Sound power LWA, guaranteed	99.0 dB(A)

Chassis

Operating pressure	240.0 bar

Shipping and Storage

Shipping weight	14,917.0 kg

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2025 Wacker Neuson SE | www.wackerneuson.com

Dimensions

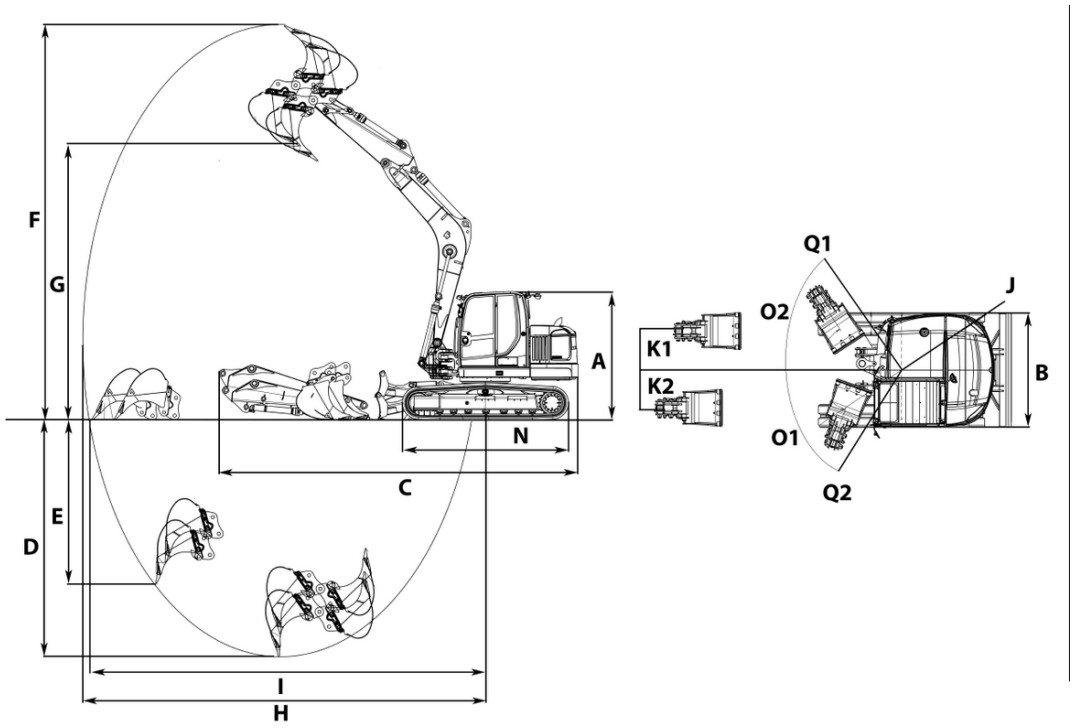

A	Height with cab	2,786 mm
B	Width of dozer blade	2,490 mm
C	Transport length short shovel arm	7,720 mm
	Transport length long shovel arm	7,788 mm
D	Digging depth max., short shovel arm	4,981 mm
	Digging depth max., long shovel arm	5,481 mm
E	Piercing depth max., short shovel arm	3,089 mm
	Piercing depth max., long shovel arm	3,550 mm
F	Piercing height max., short shovel arm	8,228 mm
	Piercing height max., long shovel arm	8,552 mm
G	Dumping height max., short shovel arm	5,620 mm
	Dumping height max., long shovel arm	5,945 mm
H	Digging radius max., short shovel arm	8,261 mm
	Digging radius max., long shovel arm	8,727 mm
I	Max. reach at ground level (short shovel arm)	8,044 mm
	Max. reach at ground level (long shovel arm)	8,527 mm
J	Tail swing radius	2,017 mm
K1	Boom offset max. (to center of bucket right side)	846 mm
K2	Boom offset max. (to center of bucket left side)	638 mm
N	Length travel drive	3,604 mm
O1	Max. swivel angle (arm system to the left)	70 °
O2	Max. swivel angle (arm system to the right)	57 °
Q1	Boom swing radius right	2,643 mm
Q2	Boom swing radius left	2,322 mm

The illustrations, equipment and data shown may deviate from the current delivery program of your country. Optional equipment subject to additional charge may be shown. Subject to changes.

Copyright © 2025 Wacker Neuson SE | www.wackerneuson.com